

Diagnostic Audiometer AD226

- Efficient Hearing Examinations



Audiometry *precision*

Features

- 125Hz - 8000Hz
- -10dB to 120dBHL output
- Air and Bone Conduction
- WN and NB masking
- 5dB and 1dB attenuators
- Insert Phones (optional)
- Pure, Warble and Pulsed tones
- Automatic Threshold test
- SISI and Bekesy tests
- Stenger and ABLB tests
- Tone in Noise test (Langenbeck)
- Talk Forward
- RS232 connection for PC
- PC on-line monitoring available
- NOAH compatible
- Carrying case (optional)

Applications

The high quality of the AD226 makes it particularly well suited for any stationary or portable application where diagnostic testing of air and bone conduction thresholds is performed. The time saving automatic test function combined with the computer interface makes the AD226 ideal for modern healthcare environments. The Talk Forward function is a nice convenience, especially with sound room installations. Full NOAH compatibility completes the picture.

Automatic Testing

The AD226 incorporates a function for performing thresholds automatically. The test procedure is based on either the Hughson-Westlake method (up 5 dB, down 10 dB) or the standard OSHA procedure. Desired test frequencies may be selected freely by the user. The Bekesy test is also available featuring pure tone, pulse tone, narrow band noise or white noise as stimuli as well as

masking with narrow band noise. Upon test completion the test results can be recalled from memory of the AD226 or transferred to a PC for database storage or printing.

The AD226 can perform the following:

- Stenger (for malingering)
- SISI
- ABLB
- Langenbeck

Insert Phones

The optional insert phones may be supplied along with the standard TDH39 audiometric headset.


Insert phones:

- Provide very low cross hearing
- Reduce the need for masking
- Reduce ambient noise

leading diagnostic solutions



Interconnections

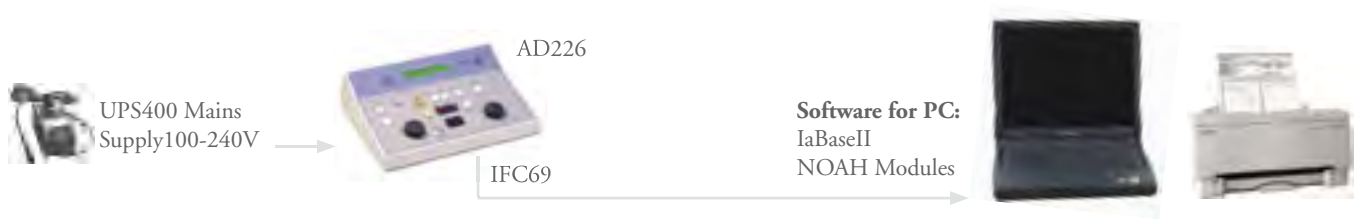

General Technical Specifications

Standards:

Audiometer: EN 60645 -1, ANSI S3.6, Type 3
Safety: EN 60601-1.

Medical CE-mark:

Interacoustics A/S meets the requirements of the Annex II of the Medical Device Directive 93/42/EEC. Approval of the quality system is made by TÜV – identification no. 0123.

Audiometer Type: 3.

Calibration: AC: ISO 389-1 (TDH39), ISO 389-2 (EARTone5A), BC: ISO 389-3.

Frequencies and Maximum Hearing Levels:

	AC dBHL	AC dBHL	BC dBHL
Hz	TDH39	EARTone3A/5A	B71
125	90	95	
250	110	100	45
500	120	110	65
750	120	120	70
1000	120	120	70
1500	120	120	70
2000	120	120	75
3000	120	120	80
4000	120	120	80
6000	120	105	55
8000	110	100	50

Extended Range Function: If not selected, the AC output will be limited to 20dB below maximum output.

Input: Tone, Warble Tone +5%, 5Hz (true sine wave frequency modulation).

Included Parts:

TDH39 Audiometric Headset
B71 Bone Conductor
APS2 Patient Response Button
UPS400 External Power Supply
200 AF12 Audiogram Charts
3 Pens
IA NOAH Aud Software Module
RS232 Cable
Operation Manual
Multilingual CE Instructions for Use

Masking stimulus: NB Noise / White Noise.

Outputs: Left, Right, Bone L+R, Insert Phones, Insert Masking

Transducers:

TDH39 Audiometric Headset
EAR-Tone3A/5A Insert Phones (optional)
B71 Bone Conductor

Talk Forward: Built in talk forward microphone. 0-110dB SPL continuously adjustable on operation panel.

Tone Presentation: Manual or Reverse.

Single pulse.
Multiple pulses 250-5000 msec. on/off.

Auto Threshold: Patient controlled Hughson Westlake procedure according to ISO 8253 or OSHA procedure according to NIOSH.

Frequency Selection: 125Hz, 250Hz, 500 Hz, 750Hz, 1500Hz or 8kHz may freely be deselected if a quicker test routine is desired.

Synchronous Masking: Locks channel 2 attenuator to channel 1 attenuator.

Store Function: Internal memory for AC L/R and BC L/R.

Tests:

SISI with auto score calculation. (5dB included for familiarisation).

ABLB

Stenger (Binaural pure tone stimulation).
Langenbeck (Tone in Noise).

Bekesy Test:

Pure Tone or Narrow Band stimulation. Fixed frequency. Continuous and pulsed tone. OSHA automatic pure tone test procedure.

Display: Alpha-Numeric Display.

Patient Signal: Reed switch push button.

Interface: Bi-directional RS232C.

Examples of Compatible Windows Software:

IaBaseII database program.
NOAH hearing aid fitting software.

Construction: Plastic cabinet

Attenuator controls:

Rotary switches (Push buttons optional)

Power Supply: External UPS400 (included). 100 - 115 V or 230 V Please specify.

Consumption: 40 VA

Dimensions: (W x D x H) 300 x 230 x 90mm/ 12x9x4 inches.

Weight: 1.3kg/2.9 lbs. (external power supply UPS400 + 0.8kg/1.8 lbs.)

Air freight packing:

1 case: 73x36x17 cm /29x14x7 inches.
Gross weight: 5.2 kg/11.5 lbs.

Optional Parts:

ACC26 Carrying Case
EARTone3A/5A Audiometric Insert Phones
IFC69 (9 pins) computer cable

The optional lightweight carrying case ACC26 will hold the AD226 as well as a noise reducing headset and audiogram charts etc.



AUDIOMETRICS INC.

4510 Marlena Street

Bossier City, LA 71111

800-326-2706

www.audiometrics.com

